

Boat Hoist USA Galvanized 10K and 12K 4 - Post Lifts


10000 & 12000 lb Lifts

Includes all components except the galvanized bolts, nuts and washers to attach the lift to the already existing pilings. And the boards for the bunks.*



Electrical Requirements:

10K = Two 3/4hp motors at 22 amps minimum, # 10 wire*

12K = Two 1hp motors at 26 amps minimum, # 8 wire*

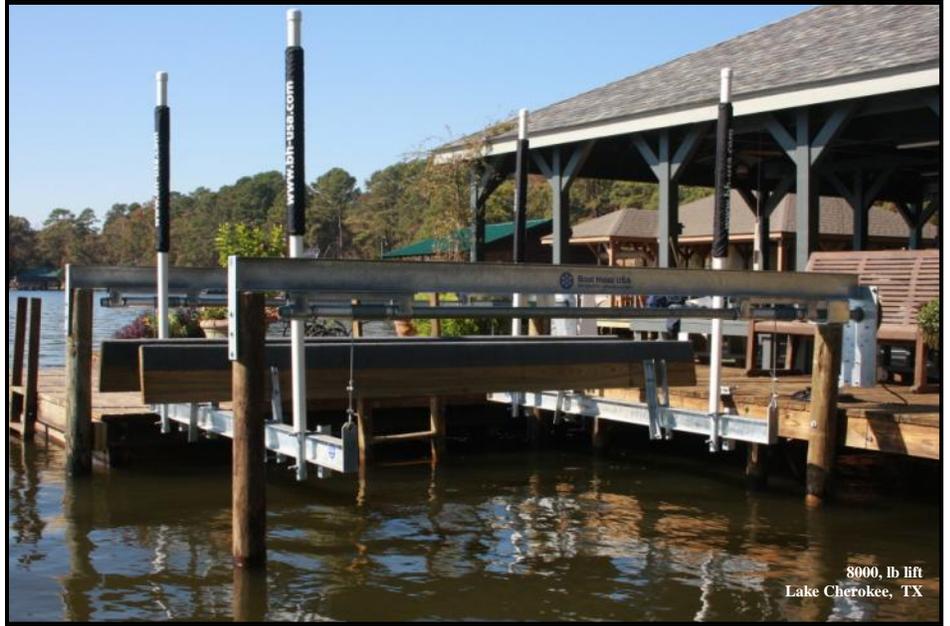


8000 lb lift
Lake Cherokee, TX

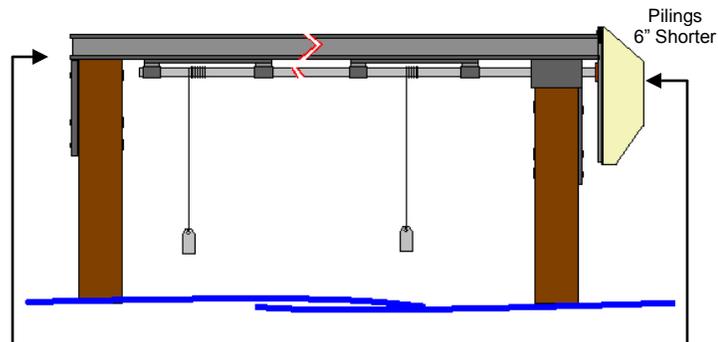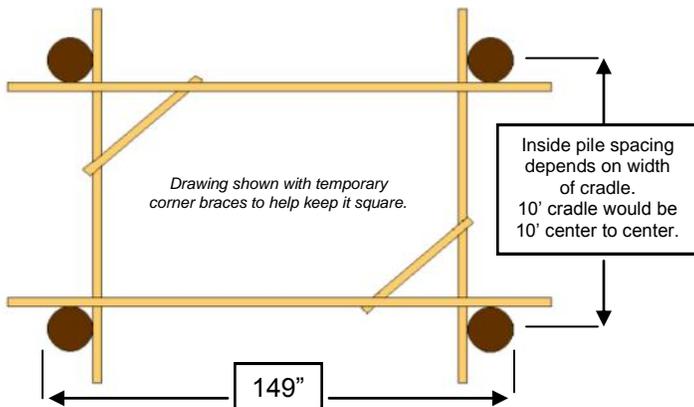

8" pilings need to be installed with sufficient seabed penetration to support the weight of the boat. Pilings must be square and level to each other. The two drive end pilings (the pilings where the hoists are mounted) should be 6" shorter than the 2 other pilings. ANY movement of the pilings after installation will adversely affect lift operation and safety.

The Boat Hoist USA hoists are secured to the top beam with 1/2" x 1 1/2" bolts (included). Mount the back cover between the gear plate and top-beam first, then align the hole in the drive pipe with the hole in the large gear sleeve. Insert the gear sleeve bolt and "snap" the front cover to the back cover.

10K and 12K lifts will be supplied with 132 ft 5/16" 7 x 19 cable to be able to compound the lift, the 10K and 12K top beams differ from the 6 and 8K in that they have dead man brackets welded to each beam to attach your cable. Cradles are supplied with compounding blocks.

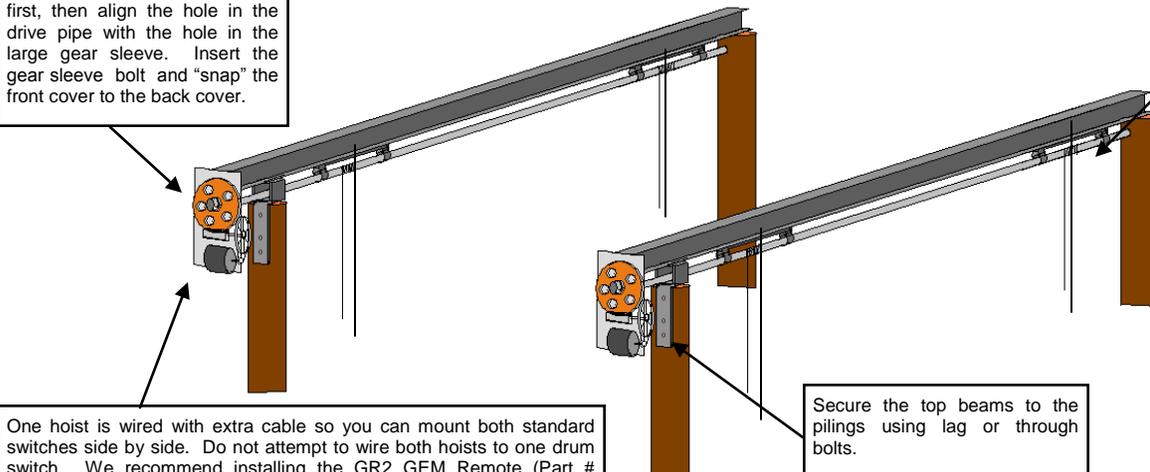

One hoist is wired with extra cable so you can mount both standard switches side by side. Do not attempt to wire both hoists to one drum switch. We recommend installing the GR2 GEM Remote (Part # 400013). The GR2 is designed to operate 1-2 motors at the same time and is designed for this type of boat lift.

Secure the top beams to the pilings using lag or through bolts.

NOTE: Attachment bolts to piling are not provided.

Specifications 10 - 12K	
Top Beam Length	13'
Top Beam Make	6" x 4" 9# WF
Drive Pipe	2" ID sch 40
Cable dia/length	33' / .313
Bottom Beam Make	6" 12.5#
Bottom Beam Length	10ft*

* Wire size depends on length of wire from main power to lift. Refer to the wire chart on page 8 of the Boat Hoist USA Equipment Guide. The Equipment Guide can be found in Product Support Center on our website: www.bh-usa.com.

* 10ft wide cradle is standard, we can accommodate special requests.